




RAHIL SARGURU
+971 0581210786



OUR EQUIPMENTS



LED SCREENS



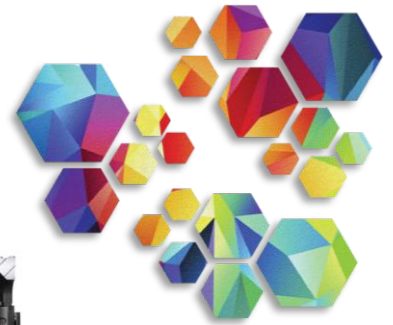


Module			
Dimensions (w x h)	250mmx250mm	Resolution (w x h)	64x64
Pixel pitch	3.9mm	Pixel Density	65536/sqm
LED Lamp	SMD1921	Pixel Configuration	3in1
Availability (SQM)	120 sqm		



Display Data			
ITEM	Width	Height	total
Cabinet Quantity(pcs)	40	10	400
Screen Area Dimension(m)	20	5	100.00
Display Resolution(dots)	5120	1280	6553600
Total Net Weight (kgs)	3800		
Total Average Power(watts)	20000	Total Max Power(watts)	60000
Maximum number of Cabinet for Lifting		20 Cabinets	

Parameter	Value
Brightness	4000 cd/sqm
Viewing Angle	Horizontal 140(+70/-70) deg. Vertical 120(+60/-60) deg.
Minimum Viewing Distance	3.9 meters
Brightness Control	256 level
Gray scale	16384
Refresh frequency	1920Hz
Driving mode	Dynamic scan constant current driving
Input power frequency	50 or 60 Hz
Input Voltage	200 ~ 240 Volt
Blind spot rate	<1/50000
Lifetime at 50% brightness	100000 hours
Ingress Protection	Front IP65, Rear IP54
Operating temperature	-20 ~ + 50 °C
Operating humidity	10% ~ 90%
Control distance	CAT5 cable: <100 m; Single mode fiber: <10 km
Signal input format	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI
Operating system	Windows 7/10

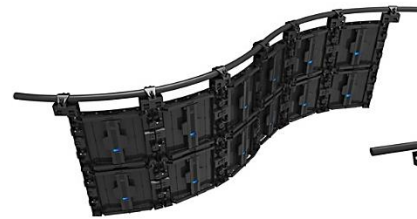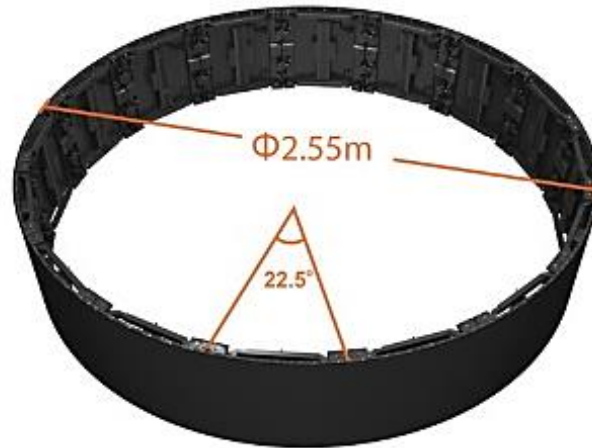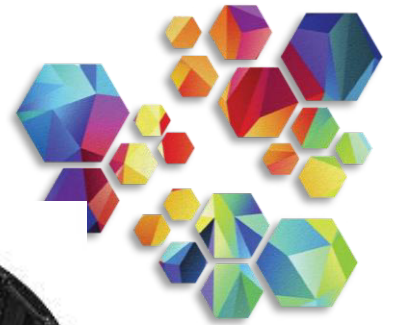

Parameter	Value
Control System	Novastar System
Product Model	C2.9TC-A01(168*168) R0-00
Flat or Flex	Flex
Panel size	500*500*70mm (19.69*19.69*2.76in)
Weight	≤7Kg/tile(15.4LB/tile)
Pixel pitch	2.9mm
Pixel density/m ²	112896
Luminosity	1000nit
Processing depth	14bit
Contrast ratio	3000:01:00
Viewing Angle	≥140°
LED Type	SMD 1R1G1B
Date refresh rate	3840Hz
Ingress protection	IP30
Power consumption (Max/Avg.)	640/220 W/m ²
Availability (SQM)	70 sqm



Aim



Fasten



Lock





**MEDIA PROCESSOR
(J6/VX4S – 15 pcs)**



Product Type : Video Controller

Inputs : DP, HDMI, VGA, DVI, CVBS, SDI

Outputs : Optical Fiber Output × 4, Ethernet port × 4

Loading Capacity : 2.35 million pixels, the maximum pixel CLK is 165MHz

Video Loop : DVI, SDI, GenLock

Video Monitor : DVI, HDMI

Communication Mode : USB/LAN

Image Mosaic : Support

Crop Settings : Support

PIP : Support

Power : Emerson original power supply

Certification : CE, ROHS, FCC, UL, EAC

Input Index

Port	Number	Resolution Specification
CVBS	2	PAL/NTSC
VGA	2	VESA Standard, support max. 1920×1200@60Hz input
DVI	1	VESA Standard (support 1080i input), support HDCP
SDI	1	480i, 576i, 720P, 1080i/P
HDMI	1	EIA/CEA-861 standard, in accordance with HDMI-1.3 standard, support HDCP
DP	1	VESA Standard

Output Index

Port	Number	Resolution Specification
DVI LOOP	1	Consistent with DVI input
VGA	1	1280×1024@60Hz 1440×900@60Hz 1680×1050@60Hz 1600×1200@60Hz 1600×1200@60Hz – Reduced 1920×1080@60Hz 2560×816@60Hz 2048×640@60Hz 1920×1200@60Hz 2304×1152@60Hz 2048×1152@60Hz 1024×1280@60Hz 1536×1536@60Hz Self-defined output resolution (Bandwidth optimization) Horizontal resolution maximum 3840 pixels Vertical resolution maximum 1920 pixels



SOUND SYSTEM



1. Line arrays / Loud Speakers


Brand	L-Acoustics
Model	K2 3-way active, dual 12"
Max SPL	147 dB
Bandwidth	35 Hz- 20 KHz
Transducers	LF: 2 x 12" MF: 4 x 6.5" HF: 2 x 3"
Weight	56 kg / 123 lb
Quantity	18



Brand	L-Acoustics
Model	KARA II 2-way active, dual 8"
Max SPL	142 dB
Bandwidth	55 Hz- 20 KHz
Transducers	LF: 2 x 8" HF: 1 x 3"
Weight	26 kg / 57 lb
Quantity	36




Brand	L-Acoustics
Model	KARA II two-way vertical linear array speaker
Max SPL	139 dB
Bandwidth	55 Hz- 20 KHz
Weight	26 kg / 57 lb
Quantity	6

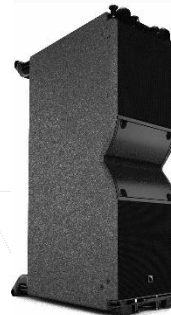

Brand	L-Acoustics
Model	K2 three-way vertical linear array speaker
Max SPL	145 dB
Bandwidth	35Hz-20kHz -10dB
Weight	56 kg
Quantity	4



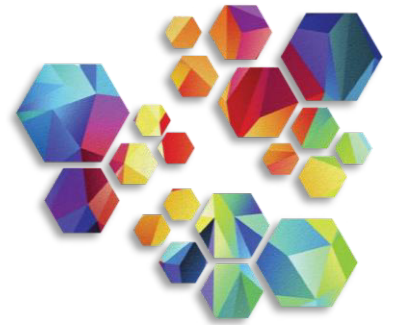

2. Subwoofer

Brand	L-Acoustics
Model	SB18 High-power subwoofer, 18"
Max SPL	138 dB
Bandwidth	32 Hz
Transducers	LF: 1 x 18"
Weight	52 kg / 115 lb
Quantity	18

Brand	L-Acoustics
Model	KS28 Reference high power subwoofer, dual 18"
Max SPL	143 dB
Bandwidth	25 Hz
Transducers	LF: 2 x 18"
Weight	79 kg / 174 lb
Quantity	18




3. Short Throw Speakers

Brand	L-Acoustics
Model	X15 HiQ 2-way active, 15"
Max SPL	138 dB
Bandwidth	55 Hz- 20 KHz
Transducers	LF: 1 x 15" HF: 1 x 3"
Weight	21 kg / 46 lb
Quantity	16



Brand	L-Acoustics
Model	X15 HiQ 2-way active, 15"
Max SPL	138 dB
Bandwidth	55 Hz- 20 KHz
Transducers	LF: 1 x 15" HF: 1 x 3"
Weight	21 kg / 46 lb
Quantity	60



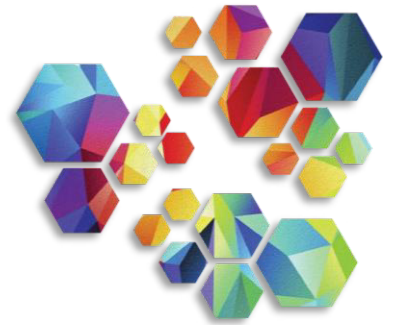

4. Medium Throw Speakers

Brand	L-Acoustics
Model	5XT 2-way passive, 5"
Max SPL	121 dB
Bandwidth	95 Hz- 20 KHz
Transducers	LF: 1 x 5" HF: 1 x 1"
Weight	3.5 kg / 7.7 lb
Quantity	16

Brand	L-Acoustics
Model	Syva 2-way passive, 5"
Max SPL	137 dB
Bandwidth	87 Hz- 20 KHz
Transducers	LF: 6 x 5" HF: 3 x 1.75"
Weight	21 kg / 46 lb
Quantity	16



5. Amplifiers

Amplified Controller	
Brand	L-Acoustics
Model	LA12X DSP power amplifier
Architecture	4 x 4
Output Power	4 x 3300 W at 2.7 ohms 4 x 2600 W at 4 ohms 4 x 1400 W at 8 ohms
Power supply	Universal SMPS with PFC
Inputs	AVB, AES, Analog
Network	Milan-certified with seamless network redundancy
Quantity	36



6. Receiver

Dual-Channel Digital Wireless Receiver

Digital Predictive Switching Diversity	
Brand	Shure
Model	ULXD4DUK K51
Tuning Range	72 MHz
Security	AES 256 encryption
Quantity	36





7. Microphone

Digital Handheld Transmitter

Brand	Shure
Model	ULXD2 SM58 K51
Security	AES 256-bit encryption
Quantity	36



8. Transmitter

Digital Bodypack Transmitter

Brand	Shure
Model	ULXD1 K51 ULXD1
Security	AES 256-bit encryption
Quantity	36



9. Antenna

Power Distribution System


Brand	Shure
Model	UA844+SWB-UK
Features	Front-mounting antenna hardware Rack-mounting hardware External power supply Antenna cables for receiver connections
Quantity	36



10. Antenna


Power Distribution System

Brand	Shure
Model	UA874WB
Tuning Range	470-900MHz
Features	Four-position gain selector switch. Low-noise signal amplifier compensates for transmission loss in coaxial cable. Integrated threaded adapter mounts easily to microphones stands.
Accessories	UA825 25' UHF Coaxial Antenna Cable
Quantity	36

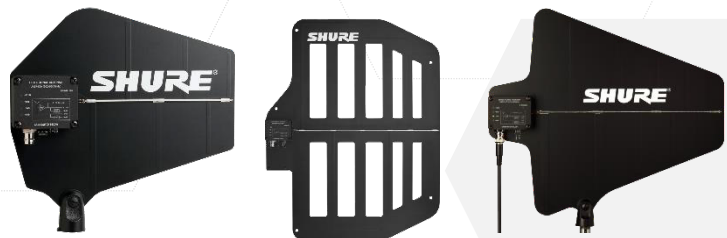



LIGHTING FIXTURES

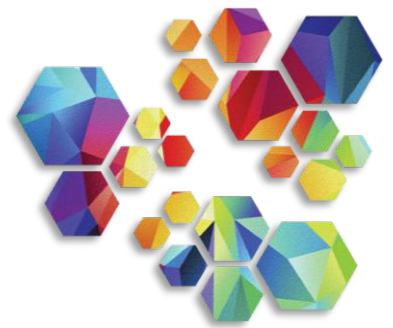

1. MOVING HEAD (GALAXY PR-8129)


Light Source:	OSRAM 19x60W LEDs (RGBW, 4 in 1), 2700K~10000K, 50,000 hrs
Input Voltages:	100V~240V AC, 50/60Hz
Power Consumption:	1400W@220V
Strobe:	electronic strobe, 0-25 F.P.S, preset pulse strobe macros
Dimmer:	0-100% linearly adjustable
Effect:	rainbow, wash, beam, profile, effect modes (kaleidoscope, swirl), multiple macros
Light Angle:	(1/2 peak) Θ 1/2 linear zoom: 3.3°~ 60°
Head Movement:	pan 540°, tilt 0~180° with auto position correction, speed adjustable. Pan tilt swap and invert function
Control:	DMX512, 5 pins (optional 3 pins) interface
Channels:	standard mode 19 channels and extended mode 92 channels
Other Functions:	pixel control, each color of RGBW of a LED lamp controllable
Housing:	high temperature engineering plastic
Components	IP20
Net Weight:	29.5kg
Quantity	60



2. BEAM (LIGHTSKY F450II)

Light Source:	LIGHTSKY (NSL-450 USHIO) 6200K, 1200H
Input Voltages:	AC100-240V 50/60Hz
Power Consumption:	600W@220V
Strobe:	Double strobe structure, 0.5-9 times/second adjustable
Dimmer:	0-100% linear adjustment
Effect:	1 white color+14 color wheel, quick rainbow effect, 1 blank gobo+11 gobo+3 animation range, 8 prism+16 double prism +prism combination
Light Angle:	0-2.0°
Head Movement:	pan 540°, tilt 0~180° with auto position correction, speed adjustable. Pan tilt swap and invert function
Control:	DMX512, RDM
Channels:	Standard 16CH, Simple 14CH, 16PLUS CH
Other Functions:	Remote control lamp switch, fan & speed 100W power would lower Automatically under full shutter condition.
Housing:	Adopt anti-aging and anti-fire plastic cover, high strength alloy cold pressing molding core material
Components	IP20
Net Weight:	20.8 Kg/24.2Kg
Quantity	130



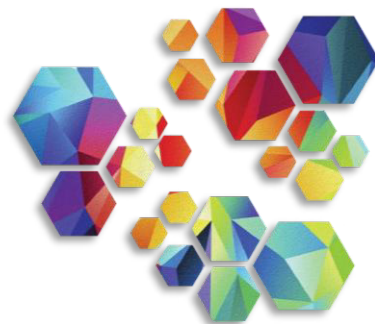

3. MOVING BEAM SPOT WASH (LIGHTSKY AURORA)


Light Source:	OSRAM SIRIUS HRI 471W SN 6300K-7500K, 1500h
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	620W@220V
Strobe:	Double strobe structure, 0.5-9 times/second adjustable
Dimmer:	0-100% linear adjustment
Effect:	13 colors + white, Bi-direction rainbow effect, 14 fixed gobos + white, Bi-direction flow, water animation effect, 9 rotating Gobos + white, Bi-direction flow, water animation effect
Light Angle:	Beam Projection 2°~21°, Spot Projection 3°~42°
Head Movement:	pan 540°, tilt 0~180° with auto position correction, speed adjustable. Pan tilt swap and invert function
Control:	DMX512, RDM
Channels:	33CH (standard)
Other Functions:	The lamp's switch can be controlled remotely; the cooling fan can be adjustable automatically; the lamp power will decrease when the fixture turns off. DMX address can be reset remotely via control panel The lamp's heat dissipation can be adjustable with G-sensor system.
Housing:	Heat-proof plastic + module pressing alloy materials.
Components	IP20
Net Weight:	29.0kg / 32.50kg
Quantity	10



4. MOVING BEAM SPOT WASH (LIGHTSKY F400BSW)

Light Source:	LIGHT SKY USHIO NSL360(31mmWD) 6900K, 1500h
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	495W@220V
Strobe:	Double strobe structure, 0.5-9 times/second adjustable
Dimmer:	0-100% linear adjustment
Effect:	14 colors + white, Bi-direction rainbow effect, 14 fixed gobos + white, Bi-direction flow, water animation effect, 9 rotating Gobos + white, Bi-direction flow, water animation effect
Light Angle:	Beam Projection 0-1.5°, Spot Projection 1.5-20°
Head Movement:	pan 540°/250°, Pan tilt 2.11°/0.98°, speed 2.7 S/1.6 S. 15 super quiet motors
Control:	DMX512
Channels:	20CH, 18CH
Other Functions:	Built-in battery, IP could be set without electricity
Housing:	Heat-proof plastic + module pressing alloy materials.
Components	IP20
Net Weight:	22.5kg/25.5kg
Quantity	10




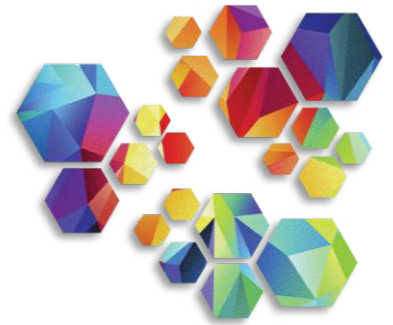

5. LED MOVING WASH (LIGHTSKY TX1940ZOOM)

Light Source:	OSRAM 40W, RGBW 4 in 1 LED chip, 19 LAMPS, 20000H
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	632W
Strobe:	1-30 times/ second electronic strobe and random strobe
Dimmer:	65536 class electronic dimmer
Effect:	RGBW macro color system
Light Angle:	Zoom function min.5°, max.55°
Head Movement:	540°/2.5 s,220°/1.0s
Control:	DMX512, RDM, Stand-alone mode ArtNet (optional), Wireless DMX512
Channels:	Standard(13CH), Extended(23CH), Simple Mode(9CH), HSIC Mode(12CH)
Other Functions:	Customizable parts: lamp, gobo, color, LOGO, Package, lens degree etc
Housing:	adopt ABS anti-fire plastic.
Components	IP20
Net Weight:	21kg
Quantity	60




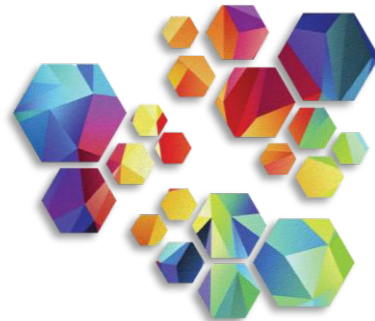

6. LAMP BEAM MOVING HEAD (LIGHTSKY F230II)

Light Source:	Osram Sirius (230W), 8000K, 2000H
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	345W
Strobe:	Double strobe structure, 0.5-9 times/second (adjustable)
Effect:	1 white color+14 color wheel, 1 blank gobo + 11 gobo + 3 animation range, 8prism+16 double prism +prism combination
Light Angle:	2.5°
Head Movement:	540°/2.5 s, 220°/1.0s
Control:	DMX512, RDM
Channels:	14CH/16CH
Other Functions:	Customizable parts: lamp, gobo, color, LOGO, Package, lens degree etc.
Housing:	adopt ABS anti-fire plastic.
Components	IP20
Net Weight:	17.5 kgs
Quantity	60



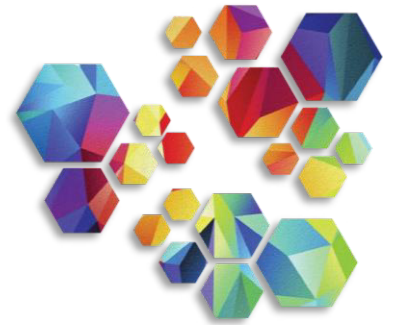

7. LAMP BEAM MOVING HEAD (LIGHTSKY F330II)

Light Source:	Osram Sirius (230W), 8000K, 2000H
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	345W
Strobe:	Double strobe structure, 0.5-9 times/second (adjustable)
Effect:	1 white color+14 color wheel, 1 blank gobo + 11 gobo + 3 animation range, 8prism+16 double prism +prism combination
Light Angle:	2.5°
Head Movement:	540°/2.5 s, 220°/1.0s
Control:	DMX512, RDM
Channels:	14CH/16CH
Other Functions:	Customizable parts: lamp, gobo, color, LOGO, Package, lens degree etc.
Housing:	adopt ABS anti-fire plastic.
Components	IP20
Net Weight:	17.5 kgs
Quantity	80



8. FL1000
1000W BSWF
LED Profile Moving Head
Qty. 6 Un



9. FL700
700W BSWF
LED Profile Moving Head
Qty. 2 Un



10. 400W BSW
LED Moving Head
Qty. 10 Un

11. OUTDOOR LED WASH (LIGHTSKY PL1015W)


Light Source:	Tian Xin 15W, RGBW 4 in 1 LED chip, 10 PCS, 20000h
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	100W
Strobe:	1-30times/second electronic strobe and random strobe
Dimmer:	65536 class electronic dimmer
Effect:	RGBW macro color system. LED can be controlled pixel by pixel, delivering versatile effects
Light Angle:	22° (standard); (optional) 8°; 15°; 45°
Control:	DMX512, RDM
Channels:	Standard channel: 9CH; Extend channel: 45CH ; 18CH; 25CH
Other Functions:	Customizable parts: lamp, gobo, color, LOGO, Package, lens degree etc./ Quick lock seamless splicing (same light source distance after splicing)
Housing:	die-cast aluminum alloy split thermal structure design, with good thermal performance
Components	IP65
Net Weight:	7.3 kgs
Quantity	20



12. WIRELESS LED WASH LIGHT (VSHOW AUTUMN LIGHTING WBRF0606)

Light Source:	6pcs18W high brightness 6 in 1LED, 6000-10000H
Input Voltages:	AC110~250V 50/60HZ
Power Consumption:	18W
Effect:	color change, color strobe, color dimmer, color gradual change/color jump change
Light Angle:	25°
Control:	DMX512, Master/Slave, Auto, Sound active, Remote, Wi-Fi
Channels:	6/10 CH
Other Functions:	16.7 million kinds of color change
Housing:	die-cast aluminum alloy split thermal structure design, with good thermal performance
Quantity	10



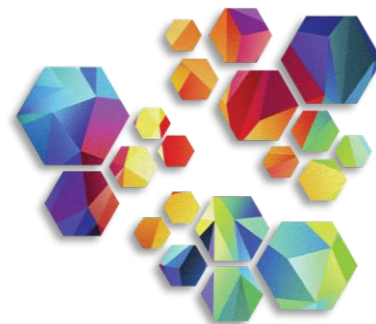

13. LED PROFILE LIGHT (NOWLITPRO QR-P200B)

Light Source:	200W LED, 50000H
Input Voltages:	AC110-240V,50-60Hz
Power Consumption:	350W
Dimmer:	0-100% linear modulation
Color:	Warm white/white (3200k/ 5600k)
Control:	DMX512, Sound, Auto, Master-slave
Channels:	4/5CH
Other Functions:	Heat Radiation, Low noise, with fan
Net Weight:	13 kgs
Quantity	10



14. LED PROFILE LIGHT (NOWLITPRO QR-P200C)

Light Source:	Original 200W COB, 60000-100000H
Input Voltages:	AC110-240V,50-60Hz
Power Consumption:	250W
Dimmer:	0-100% linear modulation
Color:	RGBW (3000K/4000K/5700K)
Light Angle:	6~50° electric zoom
Control:	DMX512, Multi Channels mode
Channels:	Multi Channels mode
Other Functions:	5-50m effective range of distance, Smart Fan with Temperature detection.
Net Weight:	4.5 kgs
Quantity	10



15. PROJECTOR LIGHTING (TOPLED SW-201P)

Light Source:	Imported 200W white light group, 7500K,
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	220W
Lumen:	5880lm/7423lm
Dimmer:	16 Bit
Light Angle:	10~30°
Control:	DMX512, RDM
Channels:	10CH,11 CH
Other Functions:	Convection + Fan cooling/Waterproof
Housing:	Magnesium - aluminum alloy
Components	IP65
Net Weight:	11.9kg
Accessories:	7 gobos each (single/full color) custom-made standard gobos
Quantity	2





16. FOUR WAY BLINDER (TOPLED FX-1500P)

Light Source:	48x40W 4-in-1 RGBW
Input Voltages:	AC110-240V,50-60Hz
Power Consumption:	1500W
Light Angle:	4.5° , 8° , 20°
Control:	DMX512
Channels:	4CH, 6CH, 9CH, 24CH, 29CH
Other Functions:	Auto Run program, User-defined
Component:	IP65
Quantity	20



17. LED FLOOD LIGHT (TOPLED FX-1500P)

Light Source:	Cree/Epistar 4-in-1 RGBW, 50000h
Input Voltages:	AC110-240V,50-60Hz
Power Consumption:	300W
Light Angle:	15° , 40° , 60°
Control:	DMX512
Channels:	4CH, 6CH, 9CH, 24CH, 29CH
Housing:	Die-Cast aluminum, Tempered Glass
Component:	IP66
Quantity	60



18. LED MOVING WASH (LIGHTSKY TX1920ZOOM)

Light Source:	OSRAM 19x20W RGBW 4 in 1 LED, 2500~10000K, 30000h
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	380W, PF0.98
Strobe:	1-30Hz electronic strobe and random strobe
Dimmer:	Electronic dimmer provides four dimming options
Effect:	RGBW macro color system
Light Angle:	7°-55° Linear electric zoom
Head Movement:	540°/2.5 s,220°/2.5s - 1.0s
Control:	DMX512, RDM
Channels:	Standard-15CH, Extend-24CH
Other Functions:	Customizable parts: lamp, gobo, color, LOGO, Package
Housing:	adopt ABS anti-fire plastic.
Components	IP20
Net Weight:	10.6 KG
Quantity	60





19. LED PAR (YC LIGHT 54X3W)

Light Source:	54 X 3W RGBW 4 in 1 LED, 8000K, 60000 – 100000H
Input Voltages:	AC100~240V 50/60HZ
Power Consumption:	200W
Strobe:	1-30Hz electronic strobe and random strobe
Effect:	RGBW macro color system, Seven color gradually
Light Angle:	7°-55° Linear electric zoom
Head Movement:	540°/2.5 s, 220°/2.5s - 1.0s
Control:	DMX512, RDM
Channels:	8CH
Other Functions:	sound control, auto, master-slave mode
Housing:	adopt ABS anti-fire plastic.
Components	IP65
Net Weight:	9.5 KG
Quantity	100



20. OUTDOOR LED WASH (CITYCOLOR LED/E)

Light Source:	5050-20W-RTBH RGBW LED
Input Voltages:	AC100~240V 47/63 Hz
Power Consumption:	650W
Dimmer:	Smooth dimming functions
Effect:	RGBW macro color system,
Light Angle:	8°, 15°, 25°, 40°, 65°
Control:	DMX512, RS-485, optocoupled input
Channels:	9CH, 5CH, 4CH
Other Functions:	Intelligent temperature control
Components	IP64
Net Weight:	32 KG
Quantity	90




21. MOVING HEAD 760 NANO WASH (AL-MH760IP)

Light Source:	3PIN XLR Higher Feet/RGBW 60W/Circle Lens 16A Black Power Cable
Quantity	30






DECORATIVE LIGHTINGS

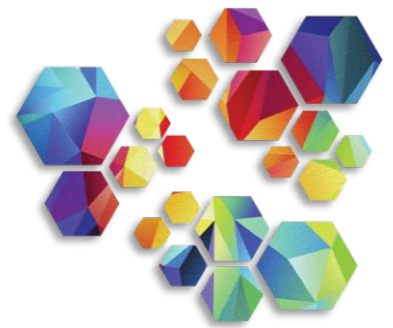

No.	Products Name	Description	Qty.
1	One-meter LED Light Bar	DC24V RGBW 64LED,64Pixel length:1Meter	1748
	Round Milky Cover	1Meter	1748
	Square Milky Cover	1Meter	1748
	Black Cover	1Meter	1748
	Clear Cover	1Meter	1748
2	Half meter LED Light Bar	DC24V RGBW 32LED,32Pixel length:0.5Meter	600
	Round Milky Cover	0.5Meter	300
	Square Milky Cover	0.5Meter	300
	Black Cover	0.5Meter	300
	Clear Cover	0.5Meter	300
3	Flexible LED Strip Light	DC24V,32LED 32Pixel Per meter, IP68, 5Meter/Rolls	300
		DC24V,32LED 32Pixel Per meter, IP68, 10Meter/Rolls	1500
4	Christmas Lights	DC12V WS2811 Christmas Lights, 12mm, Per string 65LEDs, Length 5meters, Transparent wire and connectors	924
5	One-meter LED Tube	DC24V RGBW 180LED,30Pixel length:1Meter, D40mm Milky Tube, Metal end, Both end with connectors	1740
6	Half meter LED Tube	DC24V RGBW 180LED,30Pixel length:0.5 Meter, D40mm Milky Tube, Metal end, Both end with connectors	900
ACCESSORIES			
7	8 Port ArtNet PSU	8Port output, 8*640Pixel, Save and record function	48
8	D20mm Neon Tube	D20mm Neon Tube, Silicone material	3000
9	SK6812 60LED_RGBW	SK6812 60LED_RGBW Black PCB	1800
10	4 Port ArtNet controller	4 Port ArtNet controller, Save and record function	12
11	LED Control Software and Key	LED Control Software and Key	6
12	Flight case for LED Light Bar	Flight case for LED Light Bar, with bigger wheel, print logo	36
13	Flight case for controller	Flight case for controller	18
14	Stand base	Stand base for led light bar and led tube, come with short 40mm extension rod	600
15	0.5meter extension rod	0.5meter extension rod for stand base, make them with black color metal	300
16	CLE-V Amplifier	Extending distance: 10M	30
17	CLE-VMC03	L shape 2 feet connectors	3
18	CLE-VMC04	120 degree 2 feet connectors	3
19	CLE-VMC05	Y shape connectors	3
20	CLE-VMC06	T shape 3 feet connectors	3
21	CLE-VMC07	90 degree 4 feet connectors	3
22	CLE-VMC08	60 degree 6 feet connectors	3
23	CLE-VMC013	2 feet connectors can change degree	3
24	CLE-VMC09	use for connect metal balls and stand base	600
25	CLE-VMC011	26 holes metal balls	600
26	CLE-VE-0.5m	CLE-VE-0.5m Cable	300
27	CLE-VE-1m	CLE-VE-1m Cable	300
28	CLE-VE-5m	CLE-VE-5m Cable	90



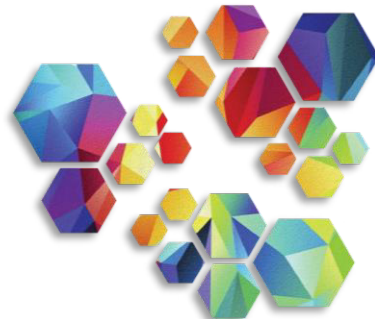

1. FIBER OPTICS (FB-172)

Light Source:	Fiber optic length 6m, IP65
Input Voltages:	AC85-265V
Dimension:	H1000mm*10pcs+H900mm*10pcs*H800mm*20pcs+700mm*10pcs (Pole)
Power:	45w *2
Color:	RGB with remote control
Color Index:	RA ≥80
Quantity	600 sticks



2. FIBER OPTICS (FB-165)

Light Source:	Fiber optic length 6m, IP65
Input Voltages:	AC85-265V
Dimension:	H1000mm*10pcs+H900mm*10pcs*H800mm*20pcs+700mm*10pcs (Pole)
Power:	45w *2
Color:	RGB with remote control
Color Index:	RA ≥80
Quantity	600 sticks




3. FIBER OPTICS (FK-025-600)

Light Source:	Fiber optic length 6m, IP65
Input Voltages:	AC85-265V
Dimension:	H1000mm*10pcs+H900mm*10pcs*H800mm*20pcs+700mm*10pcs (Pole)
Power:	45w *2
Color:	RGB with remote control
Color Index:	RA ≥80
Quantity	1800 sticks



4. Infinite Rotating Tube (AL-007)

Specifications:	1.5M Version/3PIN XLR
Quantity	60 Un

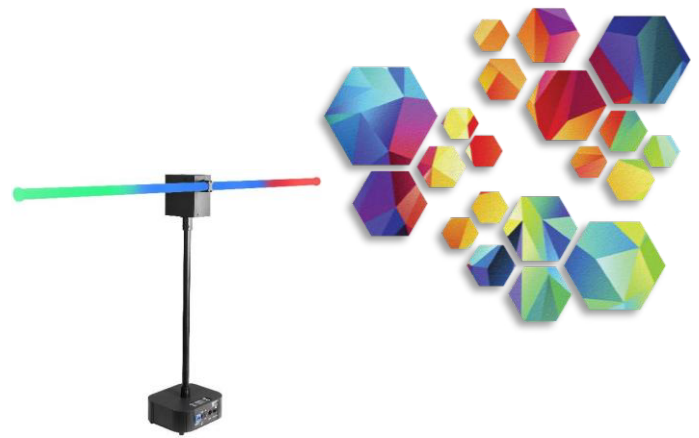

5. RGB Patt Light (AL-TT1B)

Specifications:	Black Honeycomb Design with Black Hardware Big Dish for tour label on top (Inner 18.5×13.5cm) Front Wood Panel for Silk Printing (Size 40×30cm)
Quantity	20 Un



6. Pixel Strip 80 (AL-DC180IP)

Specifications:	Fiber optic length 6m, IP65
Quantity	4 Un



7. M17-RGB30000 (30W RGB Laser)

Specifications:	635nm- 10W/G525nm-10W/B450nm-12W
Quantity	2 Un



8. M17-RGB20000 (20W RGB Laser)

Specifications:	635nm- 5W/G525nm-6W/B450nm-9W
Quantity	4 Un



9. M17-RGB40000 (40W RGB Laser)

Specifications:	R635-12W/G525- 12W/B450-18W
Quantity	2 Un



10. A10-W15000 (15W RGB ANIMATION LASER)

Specifications:	R635-4.5W/G525- 4W/B445-6.5W
Quantity	2 Un



11. Y15-W10000 (10W RGB MOVING HEAD LASER)

Specifications:	R635-3W/G525- 3W/B450-4W
Quantity	4 Un



12. Y16-12W (12W RGB BEAM LASER BAR)

Specifications:	Fiber optic length 6m, IP65
Quantity	4 Un




13. FB4 Max-Quickshow

Specifications:	Laser Show Designer
Quantity	3 Un





HOLOGRAM FANS

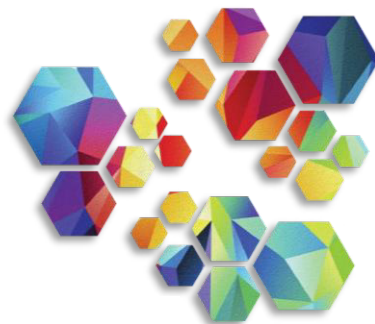


14. 65CM 3D Hologram fan

Size:	65cm diameter
LED Qty:	960pcs
Content format:	mp4, avi, rmvb jpg
Power Consumption:	65W
Input Voltage:	AC100~240V 50/60Hz
Resolution:	1600x960 pixels
Capacity:	16GB View angle: 176°
Content Upload:	By WIFI/Cloud/Memory card
Quantity	12 Un




15. 100CM 3D Hologram fan

Size:	100cm diameter
LED Qty:	1440pcs
Content format:	mp4, avi, rmvb jpg
Power Consumption:	140W
Input Voltage:	AC100~240V 50/60Hz
Resolution:	1440x 1440 pixels
Capacity:	16GB View angle: 176°
Content Upload:	By WIFI/Cloud/Memory card
Quantity	2 Un

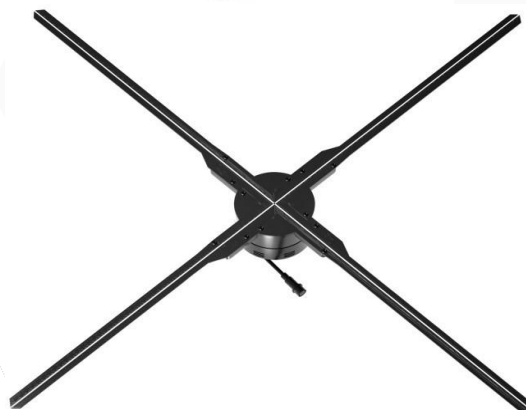


16. 100CM 3D Hologram fan

Size:	100cm diameter
LED Qty:	1440pcs
Content format:	mp4, avi, rmvb jpg
Power Consumption:	140W
Input Voltage:	AC100~240V 50/60Hz
Resolution:	1440x 1440 pixels
Capacity:	16GB View angle: 176°
Content Upload:	By WIFI/Cloud/Memory card
Quantity	2 Un

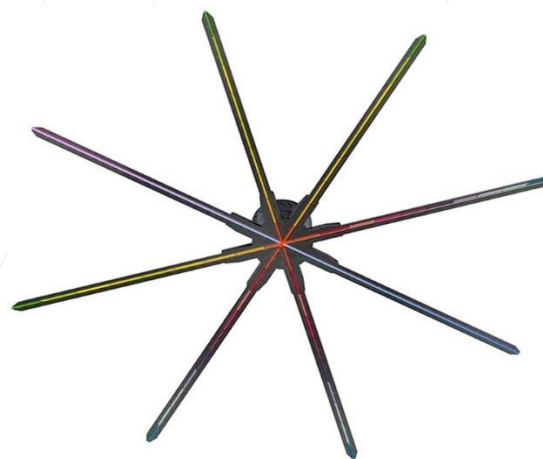




17. Z3 cover (6 Pcs)

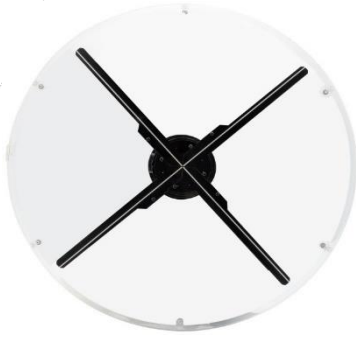

18. Z5s cover (2 Pcs)

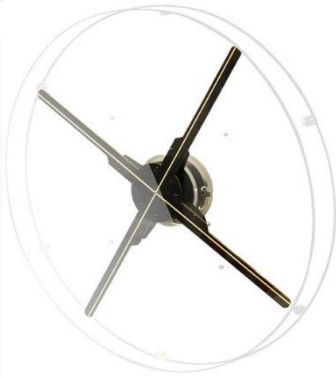

19. Floor Triangular Bracket Stand (12 Pcs)




20. 3pcs Z3/Z3H Video Wall Display Case (2 Pcs)



21. Z1/Z3/Z3H/Z7H Hoisting bracket (8 Pcs)



22. 9Pcs video wall support (1 Pc)

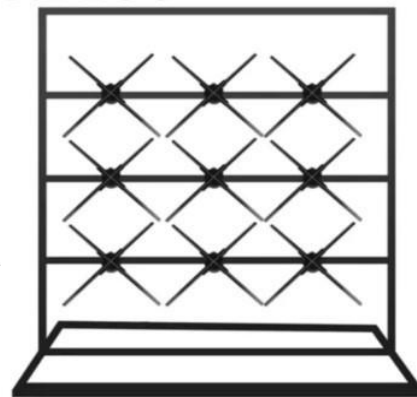



SPECIAL FX MACHINES



1. **DJ POWER H-1S (MOVING HEAD FOG MACHINE)**
24 PCS



5. **DJ POWER X-SW2200 (LOW-WATER FOG MACHINE)**
6 PCS



2. **DJ POWER H-7D (DUAL NOZZLE FOG MACHINE)**
6 PCS



6. **DJ POWER WP-4 (BUBBLE FOG MACHINE)**
2 PCS



3. **DJ POWER H-2VSD (LED VERTICAL FOG MACHINE)**
6 PCS



7. **DJ POWER DHZ-660 (500W OIL-BASED HAZE MACHINE)**
2 PCS



4. **DJ POWER H-4000 (PRO WAVE HAZE MACHINE)**
6 PCS




8. **DJ POWER DHZ-780 (OIL-BASED HAZE MACHINE)**
2 PCS





OTHERS

(Accessories, Controllers, etc.)

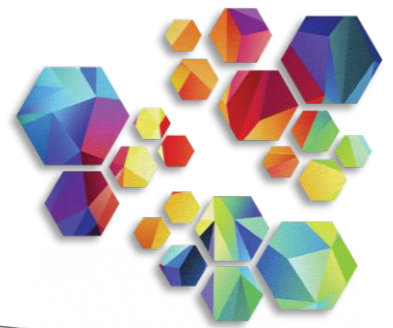

1. AVOLITES TIGER TOUCH II

Input Voltage	AC 110V – 240V, 40 – 50 Hz
Operating System	Powerful Titan V.10
Processor	Dual Core, 120 GB Disk, 4GB RAM
Support	ArtNet, 10 DMX Output, 6144 Channels
Dimensions	675 x 435 x 147 mm
Net Weight	15.2 kgs
Availability	11 pcs



2. AVOLITES QUARTZ (5 pcs)

Input Voltage	AC 110V – 240V, 40 – 50 Hz
Operating System	Powerful Titan V.10
Processor	Dual Core, 120 GB Disk, 4GB RAM
Support	4 physical DMX outputs, up to 16 over ArtNet or sACN - 8192 channels
Dimensions	425 x 466 x 194 mm
Net Weight	8 kgs
Availability	15 pcs



3. GRAND MA 2

Input Voltage	AC 120V – 230V, 40 – 50 Hz
Operating System	MA NSP/NPU
Processor	
Support	DMX, Sound, SMPTE, MIDI
Dimensions	1284 x 204 x 661 mm
Net Weight	4.9 kgs
Availability	6 Pcs



4. V6-R (Double Brake)

Lifting capacity	1 Ton
Lifting height	25m
Output Power	0.9KW
Voltage	380V,3Phase
Lifting Speed	4m/min
Size of Chain	7*20mm
Protection Level	IP55
Net Weight	44.4Kg
Chain Weight	1.1Kg/m
Availability	24 pcs



5. Flight Case for V6-R (12 pcs)


Flight Case for V6-R, One Kits V6-R one Flight Case



6. 4 Way Flight Case Controller (3 pc)

4 Way Flight Case for V6-R Hoist, come with Flight Case



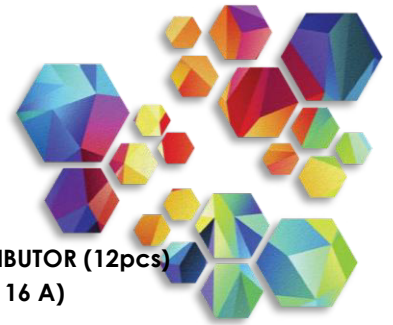

- 7. 8 Way Flight Case Controller (3 pc)**
8 Way Flight Case for V6-R Hoist, come with Flight Case



- 8. M1 Hand Hoist (M1/1T*9M) (15pcs)**
M1 Hand Hoist, Two kits in one Red Metal Box



- 9. Chain Bag for M1 hand hoist, Black bag for 1T M1 Hand Hoist Chain Bag (30 pcs)**



- 10. 10 CH POWER DISTRIBUTOR (18 pcs)**



- 11. 15 CH POWER DISTRIBUTOR (12 pcs)**



- 12. 6 CH POWER DISTRIBUTOR (12pcs)**
(32A 3 PIN + 6 PCS 16 A)



- 13. 6 CH POWER DISTRIBUTOR (30 pcs)**
(32A 3 PIN + 6 PCS 16 A)



- 14. Cable Tester (84 pcs)**




- 15. DMX 8-WAY HANGING AMPLIFIER (36 pcs)**



- 16. DMX 6-WAY HANGING AMPLIFIER (36 pcs)**



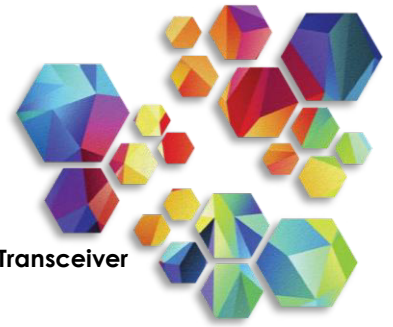

17. DMX 8-WAY HANGING AMPLIFIER (30 pcs)



18. DMX 8-WAY AMPLIFIER (36 pcs)



19. Outdoor Waterproof Wireless Receiver (QR-W4A RX – 6 pcs)



20. Outdoor Waterproof Wireless Transceiver (QR-W4A TX – 3 pc)



21. 6CH Wireless Round Splitter (QR-R6 – 3 pc)



22. DMX Wireless Box Transceiver (QR-W9 – 6 pcs)



23. DMX 8-WAY HANGING AMPLIFIER (QR-H8 – 3 pc)



24. DMX 8-WAY WIRELESS HANGING AMPLIFIER (QR-H8 – 3 pc)



25. 6CH WATERPROOF SPLITTER (QR-W6 – 3 pc)



26. 6CH ORDINARY ROUND SPLITTER (QR-R6 – 3 pc)





27. P2 (1 pc)



28. T1 (1 pc)



29. NPU (1 pc)



30. Sapphire Touch Light (1 pc)



31. TNP (1 pc)



32. ARTNET-8 (3 pc)




33. DMX-8 SPLITTER (4 pc)







TRUSSES & STAGE

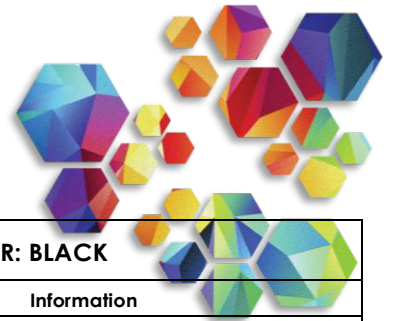

BRAND: TOP TRUSS (Set 1)				COLOR: BLACK	
No.	Model Code	Specification	Remark	Qty.	Information
1	TOP-V010BT	($\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$) 1.0M		60	EN-AW ALLOY 6082-T6 Main Tubes: $\phi 50 \times 3.0 \text{mm}$ Brace: $\phi 20 \times 2.0 \text{mm}$
2	TOP-V020BT	($\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$) 2.0M		60	
3	TOP-V030BT	($\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$) 3.0M		60	
4	TOP-V040BT	($\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$) 4.0M		60	
5	TOP-CS04TB04	$\phi 4 \text{M}$ (4PCS/CIRLCE)		6	$\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$ EN-AW ALLOY 6082-T6 Main Tubes: $\phi 50 \times 3.0 \text{mm}$ Brace: $\phi 20 \times 2.0 \text{mm}$ Diameter for outside
6	TOP-CS06TB08	$\phi 6 \text{M}$ (8PCS/CIRLCE)		6	
7	TOP-CS08TB08	$\phi 8 \text{M}$ (8PCS/CIRLCE)		3	
8	TOP-CS12BT12	$\phi 12 \text{M}$ (12PCS/CIRLCE)		3	
9	TOP-LT01	LOCKING PULLEY Pillar 290x290mm		36	with aluminum wheels
10	TOP-LT02B	MOVABLE CONNECTORS Pillar 290x290mm Beam 290x290mm & 390x390mm		36	Aluminum Plate Assembly product
11	TOP-LT03	MALE/FEMALE COUPLER		36	4PCS/SET
12	TOP-LT04	HEAVY DUTY BIG BASE 60x80mm square tubes		36	With big adjustable base Suitable for 290 & 390mm truss
13	TOP-MT05	TRESTLE Aluminium:1.5m, Iron:1.2m		144	with aluminum & iron trestle
14	TOP-BOX600B	290x290mm Box corner		90	Main Tubes 50x3.0mm
15	Box corner Accessories	1 Half Connector/1 Bolt/ 1 Spigot/ 1 R clip for one set (each box with 6 ways/24sets)		2160	Box accessories for 290x290mm truss
16	TOP-BP800F	800x800x16mm with handle		30	Square Steel Base
17	TOP-BV04F	600x600x10mm with handle		30	Holes for 220x220 & 290x290mm & 390x390mm square truss
18	Steel Base Accessories	1 Half Connector/1 Bolt/ 1 Spigot/ 1 R clip for one set		120	For 16mm thickness Steel Base
19				120	For 10mm thickness Steel Base
20	TOP-BV02C	Aluminum Base Plate 450x450x8mm		60	Holes for 220x220 & 290x290mm & 390x390mm square truss
21	Aluminum Base Accessories	1 Half Connector/1 Bolt/ 1 Spigot/ 1 R clip for one set		240	For 8mm thickness aluminum base
22	TOP-C03	HALF COUPLER 500KG, FOR D50MM TUBE.W30		60	Aluminum clamp
23	TOP-C06	QUICK COUPLER 200KG, FOR D50MM TUBE.W30		60	Aluminum clamp
24	TOP-C10	SWIVEL COUPLER 750KG, FOR D50MM TUBE.W50		60	Aluminum clamp
25	TOP-C15	Clamp with Half connector		60	Aluminum clamp
26	TOP-FD500	Male & Female coupler		120	Use for 290x290mm truss

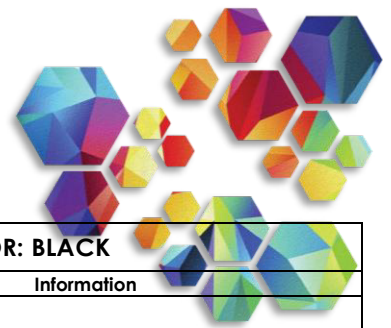
BRAND: TOP TRUSS (Set 2)
COLOR: BLACK

No.	Model Code	Specification	Remark	QTY	Information
1	TOP-V010BT	($\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$) 1.0M		54	EN-AW ALLOY 6082-T6 Main Tubes: $\phi 50 \times 3.0 \text{mm}$ Brace: $\phi 20 \times 2.0 \text{mm}$
2	TOP-V020BT	($\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$) 2.0M		66	
3	TOP-V030BT	($\phi 50 \times 290 \times 290 \text{mm} \times 3 \text{mm}$) 3.0M		90	
4	TOP-V020C	($\phi 50 \times 390 \times 390 \text{mm} \times 3 \text{mm}$) 2.0M		24	Main Tubes: $\phi 50 \times 3.0 \text{mm}$ Brace: $\phi 25 \times 2.0 \text{mm}$
5	TOP-V030C	($\phi 50 \times 390 \times 390 \text{mm} \times 3 \text{mm}$) 3.0M		36	
6	TOP-LT01	LOCKING PULLEY Pillar 290x290mm		24	with aluminum wheels
7	TOP-LT02B	MOVABLE CONNECTORS Pillar 290x290mm Beam 290x290mm & 390x390mm		24	Aluminum Plate Assembly product
8	TOP-LT03	MALE/FEMALE COUPLER		24	4PCS/SET
9	TOP-LT04	HEAVY DUTY BIG BASE 60x80mm square tubes		36	With big adjustable base Suitable for 290 & 390mm truss
10	TOP-MT05	TRESTLE Aluminium: 1.5m, Iron: 1.2m		144	with aluminum & iron trestle
11	TOP-BOX600B	290x290mm Box corner		60	Main Tubes 50x3.0mm
12	Box corner Accessories	1 Half Connector/1 Bolt/ 1 Spigot/ 1 R clip (each box with 3 ways/16sets)		720	Box accessories for 290x290mm truss
13	TOP-BP800F	800x800x16mm with handle		60	Square Steel Base Holes for 220x220 & 290x290mm & 390x390mm square truss
14	TOP-BV04F	600x600x10mm with handle		30	
15	TOP-BV02C	Aluminum Base Plate 450x450x8mm		60	Holes for 220x220 & 290x290mm & 390x390mm square truss
16	TOP-C03	HALF COUPLER 500KG, FOR D50MM TUBE.W30		60	Aluminum clamp
17	TOP-C06	QUICK COUPLER 200KG, FOR D50MM TUBE.W30		210	Aluminum clamp
18	TOP-C10	SWIVEL COUPLER 750KG, FOR D50MM TUBE.W50		60	Aluminum clamp
19	TOP-ST005	Single tube $\phi 50 \times 3 \text{mm}$ L=0.5M		60	Aluminum tubes with one-way connector
20	TOP-ST010	Single tube $\phi 50 \times 3 \text{mm}$ L=1.0M		60	
21	TOP-BOX100B	Parts of Box Corner		90	6 ways can be used Half connectors
22	Box corner Part Accessories	1 Half Connector/1 Bolt/ 1 Spigot/ 1 R clip		270	With 3 ways / 3 sets


6x4x3M SQUARE TRUSS STRUCTURE LIST (Black)

23	TOP-V020A	($\phi 32 \times 220 \times 220 \text{mm} \times 2.0 \text{mm}$) 2.0m		235.26	4
24	TOP-V030A	($\phi 32 \times 220 \times 220 \text{mm} \times 2.0 \text{mm}$) 3.0m		327.00	8
25	TOP-BOX600A	Box Corner for 220x220mm truss		282.00	4
26	Box Corner Connectors	1 Half connector / 1 Bolt / 1 Spigot / 1 R clip for one set		7.35	96
27	TOP-BV02A	Aluminum Base Plate 280x280x5mm		115.80	4



BRAND: TOP TRUSS (Set 2)

COLOR: BLACK

No.	Model Code	Specification	Remark	QTY (PCS)	Information
1	TOP-V002BT	(φ50*290*290mm*3mm)0.25M		20	290x290mm truss Main Tubes 50x3.0mm Brace:φ20x2.0mm 390x390mm truss Main Tubes 50x3.0mm Brace:φ25x2.0mm
2	TOP-V005BT	(φ50*290*290mm*3mm)0.5M		20	
3	TOP-V010BT	(φ50*290*290mm*3mm)1.0M		20	
4	TOP-V002C	(φ50*390*390mm*3mm)0.25M		10	
5	TOP-V005C	(φ50*390*390mm*3mm)0.5M		20	
6	TOP-V010C	(φ50*390*390mm*3mm)1.0M		30	
7	TOP-V020C	(φ50*390*390mm*3mm)2.0M		10	
8	TOP-BOX600C	400*400mm BOX CORNER		20	
9	Box corner Accessories	1 Half Connector/1 Bolt/ 1 Spigot/ 1 R clip for one set		240	Box accessories(With 3 ways) For 400x400mm Box corner
13	TOP-BP800F-1	800x800x16mm with handle	 With 2 handles	20	Middle & Left position for 290x290mm & 390x390mm
13	TOP-BP800F-2	800x800x16mm with handle		10	Middle & Corner position for 290x290mm & 390x390mm

KR Brand STAGE (SET 1)

No.	Model	Products	Dimension (mm)	Qty.
1	SB	Stage Platform	20 x 10 x (0.7~1.0~1.2) m	3 set
1.1	-	Alu. Stage Frame	2000x1000	30 pcs
1.2	-	Plywood -black, skid proof	Thickness 18mm	300 pcs
1.3	-	Alu. Stage Sides	2000	330 pcs
1.4	-	Alu. Stage Sides	1000	330 pcs
1.5	-	Alu. Stage Leg	700~1000~1200	363 pcs
2	-	Alu. Stage Stair	H 1200	6 pcs
3	-	Circular Stage Platform	Dia.4m Height: 0.7~1.0~1.2m	3 pc
4	-	Stage Carrier	1x1m	15pcs



KR Brand STAGE (SET 2)

No.	Model	Products	Dimension (mm)	Qty.
1	SB	Stage Platform	20 x 10 x (0.7~1.0~1.2) m	3 set
1.1	-	Alu. Stage Frame	2000x1000	300 pcs
1.2	-	Plywood -black, skidproof	Thickness 18mm	300 pcs
1.3	-	Alu. Stage Sides	2000	330 pcs
1.4	-	Alu. Stage Sides	1000	330 pcs
1.5	-	Alu. Stage Leg	700~1000~1200	363 pcs
2	-	Alu. Stage Stair	H 1200	6 pcs

